

Cassette Single Drawer Unit

Shallow Depth Drawer + Cover Top



Refrigerant

Energy Saving
Hydrocarbon R290

Applications

- Highly ergonomic storage solution, right at the point of use.
- Ideal for meat, deli and dessert prep.
- Perfect storage for garnish and 'mise en place' generally.

Two Year Parts & Labour
(including the Gaskets)
and a 5 Year Warranty
on Compressors

Operating Temperature

Tested under NSF/ANSI 7:2016
Adande Drawers operate efficiently
in ambients up to 100.4°F

Operating Flexibility

With the press of a button on the controller the chef can convert the drawer from refrigerator to freezer operation (and vice versa) in little more than 30 minutes



Storage Capacity

Maximum Weight
66 lb (30 kg)

Storage Volume
2.29 cu ft (65 litres)

Energy Usage

Tested under the
ASHRAE 72:2018
Standard, the daily Energy
Usage per Drawer unit is -

Refrigerator mode:
0.82 kWhr / 24 hrs

Freezer mode:
1.73 kWhr / 24 hrs

Electrical

Mains Supply
120 Vac 60 Hz

Running Current
2 Amps

Defrost
Automatic Electric

Supply Cord (included)
NEMA 5-15 3 Pin Socket
& 2m Coiled Lead

Options


SHALLOW DRAWER SINGLE CASSETTE + COVER TOP (T)	Flat Base (FB)	
Finished Height	14.2" (361 mm)	VLSI/FBT
Load Bearing Capacity	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	

SHALLOW DRAWER SINGLE CASSETTE + SOLID WORKTOP (W)	Flat Base (FB)	
Finished Height	14.5" (369 mm)	VLSI/FBW
Load Bearing Capacity	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	

For full options please see our [Drawer Customising](#) and [Accessories](#) pages


Plan View

One Drawer Cassette (VLSI)
With Open Drawer

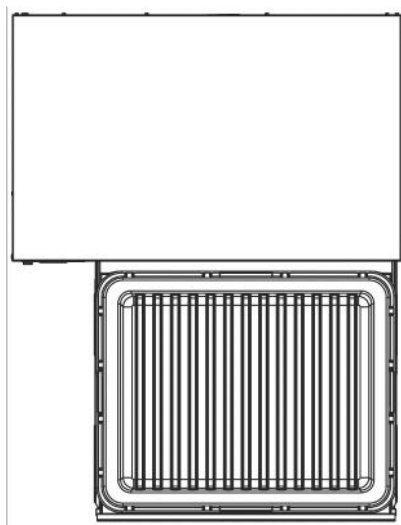

Elevation

One Shallow Cassette Drawer (VLSI)
Flat Base (FB)
Solid Worktop (W)

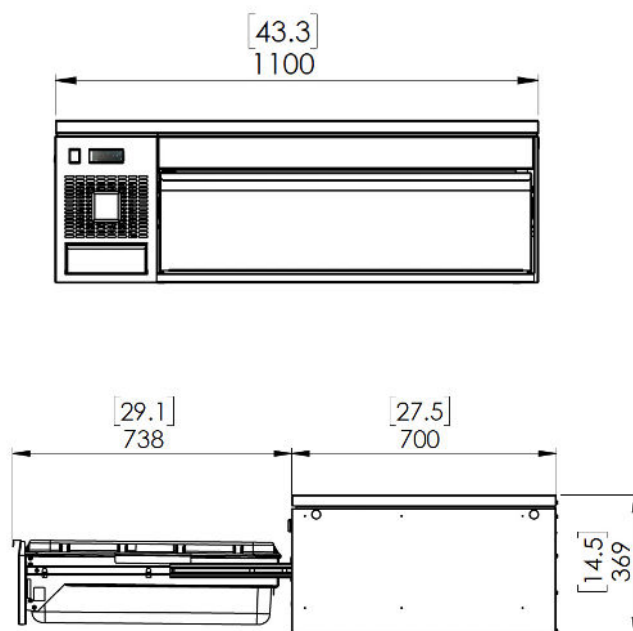

Tops



Drawer Module



Base



Must be included to complete the Cassette unit